



RoHS COMPLIANT

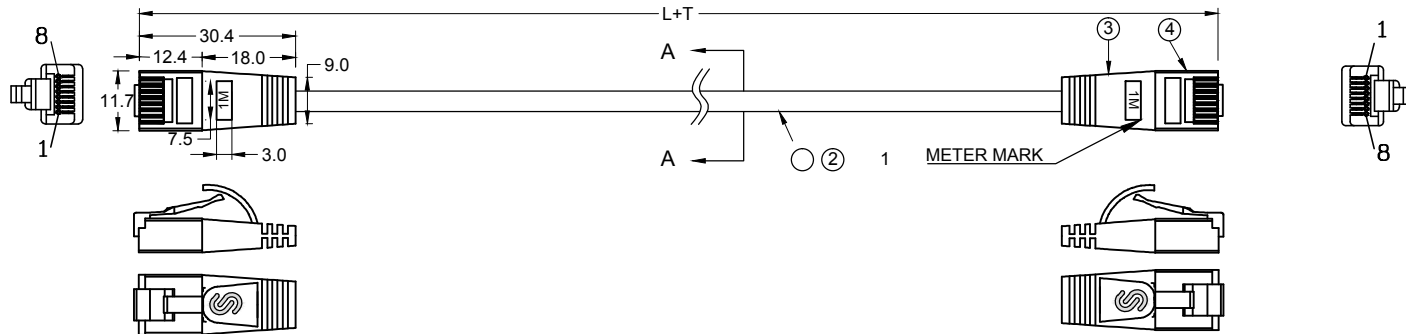

CUSTOMER P/N	LENGTH(mm)	TOLERANCE	METER MARK
PKW-LIGHT-K6 0.15	150	-0/+15mm	0.15M
PKW-LIGHT-K6 0.5	500	-0/+15mm	0.5M
PKW-LIGHT-K6 1.0	1000	-0/+20mm	1M
PKW-LIGHT-K6 1.5	1500	-5/+20mm	1.5M
PKW-LIGHT-K6 2.0	2000	-10/+30mm	2M
PKW-LIGHT-K6 3.0	3000	-20/+30mm	3M
PKW-LIGHT-K6 5.0	5000	-20/+30mm	5M
PKW-LIGHT-K6 7.5	7500	-20/+30mm	7.5M
PKW-LIGHT-K6 10.0	10000	-50/+50mm	10M

P1 P2

1	2	3	6	4	5	7	8
1	2	3	6	4	5	7	8
WHITE/ORANGE	ORANGE	WHITE/GREEN	GREEN	BLUE	WHITE/BLUE	WHITE/BROWN	BROWN

Test:

- 100%Open Short and miswire test.
- DC300V,Contact resistance(3+2L)Ω MAX.
- Insulation resistance 1MΩ MIN.
- Pass TIA Fluke DTX 1800 Cat.6 Channel Test (L≤10m)
- Temperature range: -20°C bis +60°C

Confirmed by: _____

4	RJ45 PLUG: 8P8C 3U" GOLD PLATED TWO-PIECE SHORT BODY LONG LATCH PLUG.	
3	MOLDED: PVC BOOT.	
2	CABLE:CAT 6 UTP 36AWG(7/0.08BC) 4PAIR OD=Ø2.8±0.15MM PVC JACKET.	
1	MARKING: www.justslim.eu – SLIM by Wirewin – CAT6 UTP LIGHTpatchcord – Gigabit Ethernet ready	
NO.	SPECIFICATION	QTY
	BOM LIST	

ITEM NO:	PKW-LIGHT-K6 x.x	DRAWER DATE	LY 20160612
TITLE	Cat.6 UTP Light Round Patch Cable	CHECKED DATE	MTC 20160612
CUSTOMER	TRIOTRONIK	APPROVED DATE	
MATERIAL	SCALE		
REV.	A	UNIT	MM
DRAWING NO:			
ACAD FILE	E:\		

SLIMLIGHT UTP
The original Slimpatchcord
www.justslim.eu